

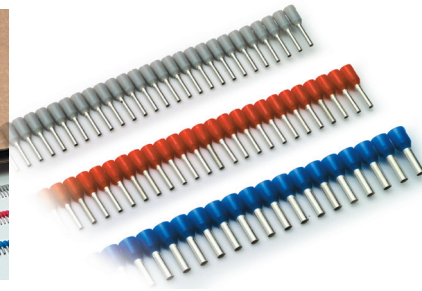


POLYPROPYLENE (PP) INSULATED CHAIN END SLEEVES TYPE CPKD.. for flexible copper cables

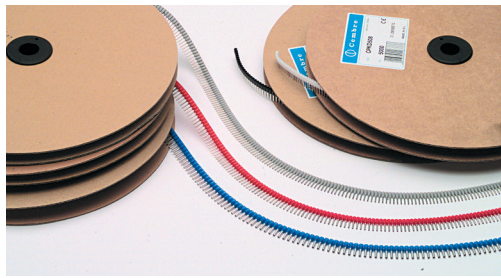


Description:

The CPKD.. ranges of end sleeves are manufactured from tin plated electrolytic copper. Designed and developed to reinforce the fine wire strands, when terminating a cable into a connector block. The CPKD serie of insulated chain end sleeves comply with specification DIN 46 228/4.

Technical details:

- The connectors are manufactured from Copper Cu DHP UNI 5649/1988 (corresponding to: SF-Cu DIN 1787/1973 Cu/bI NFA 51-050)
- Tin plated with a minimum thickness of 3µm.
- Main characteristics of the PP sleeves:
 - DIELECTRIC STRENGTH (KV/mm) : 140
 - VOLUME RESISTIVITY ($\Omega \cdot \text{cm}$) : $>10^{16}$
 - MAX OPERATING TEMPERATURE ($^{\circ}\text{C}$) : 115-130
 - FLAMMABILITY (UL-94) : V-2
 - DENSITY (g/cm^3) : 1,14
 - WATER ABSORPTION (%) : 1,5
 - BREAKING LOAD (N/mm^2) : 77
- The connectors can be used within the following temperature range: $-20 \div +115^{\circ}\text{C}$ (Surge $+130^{\circ}\text{C}$)

Sections and Dimensions:



Conductor Size sqmm	Ref.	Dimensions mm				Insulation Colour	Quantity Box/Bag
		Ø	B	P	L		
0,3÷0,5	CPKD 508	2,6	1,3	8,0	14,0	○ white	5.000
0,75	CPKD 7508	2,8	1,5	8,0	14,0	● grey	5.000
1	CPKD 108	3,0	1,7	8,0	14,0	● red	5.000
1,5	CPKD 1508	3,5	2,0	8,0	14,0	● black	5.000
2,5	CPKD 2508	4,2	2,5	8,0	14,0	● blue	3.000

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italy)
Tel.: +39 030 36921 - Telefax: +39 030 3365766
www.cembre.com - E-mail: info@cembre.com

Prepared by: Uff. Marketing

Date: 23/06/2016